

We design to outperform!

Design Creator

KCP CONCRETE PUMPS



KCP HEAVY INDUSTRIES CO.,LTD


465-3, Pasu-ri, Haman-myeon, Haman-gun,
Gyeongnam, Korea
Tel. +82-55-585-6840~3
Fax. +82-55-585-6848
Overseas Sales Dep't
Tel. +82-55-584-6850
<http://www.kcppump.com>
E-mail : kcppump@kcppump.com



KCP HEAVY INDUSTRIES CO.,LTD.

Established the Limit of Concrete Pump Technology

*Sophisticated Design & Engineering
Innovative Simple Pumping System
State of the Art Structure*

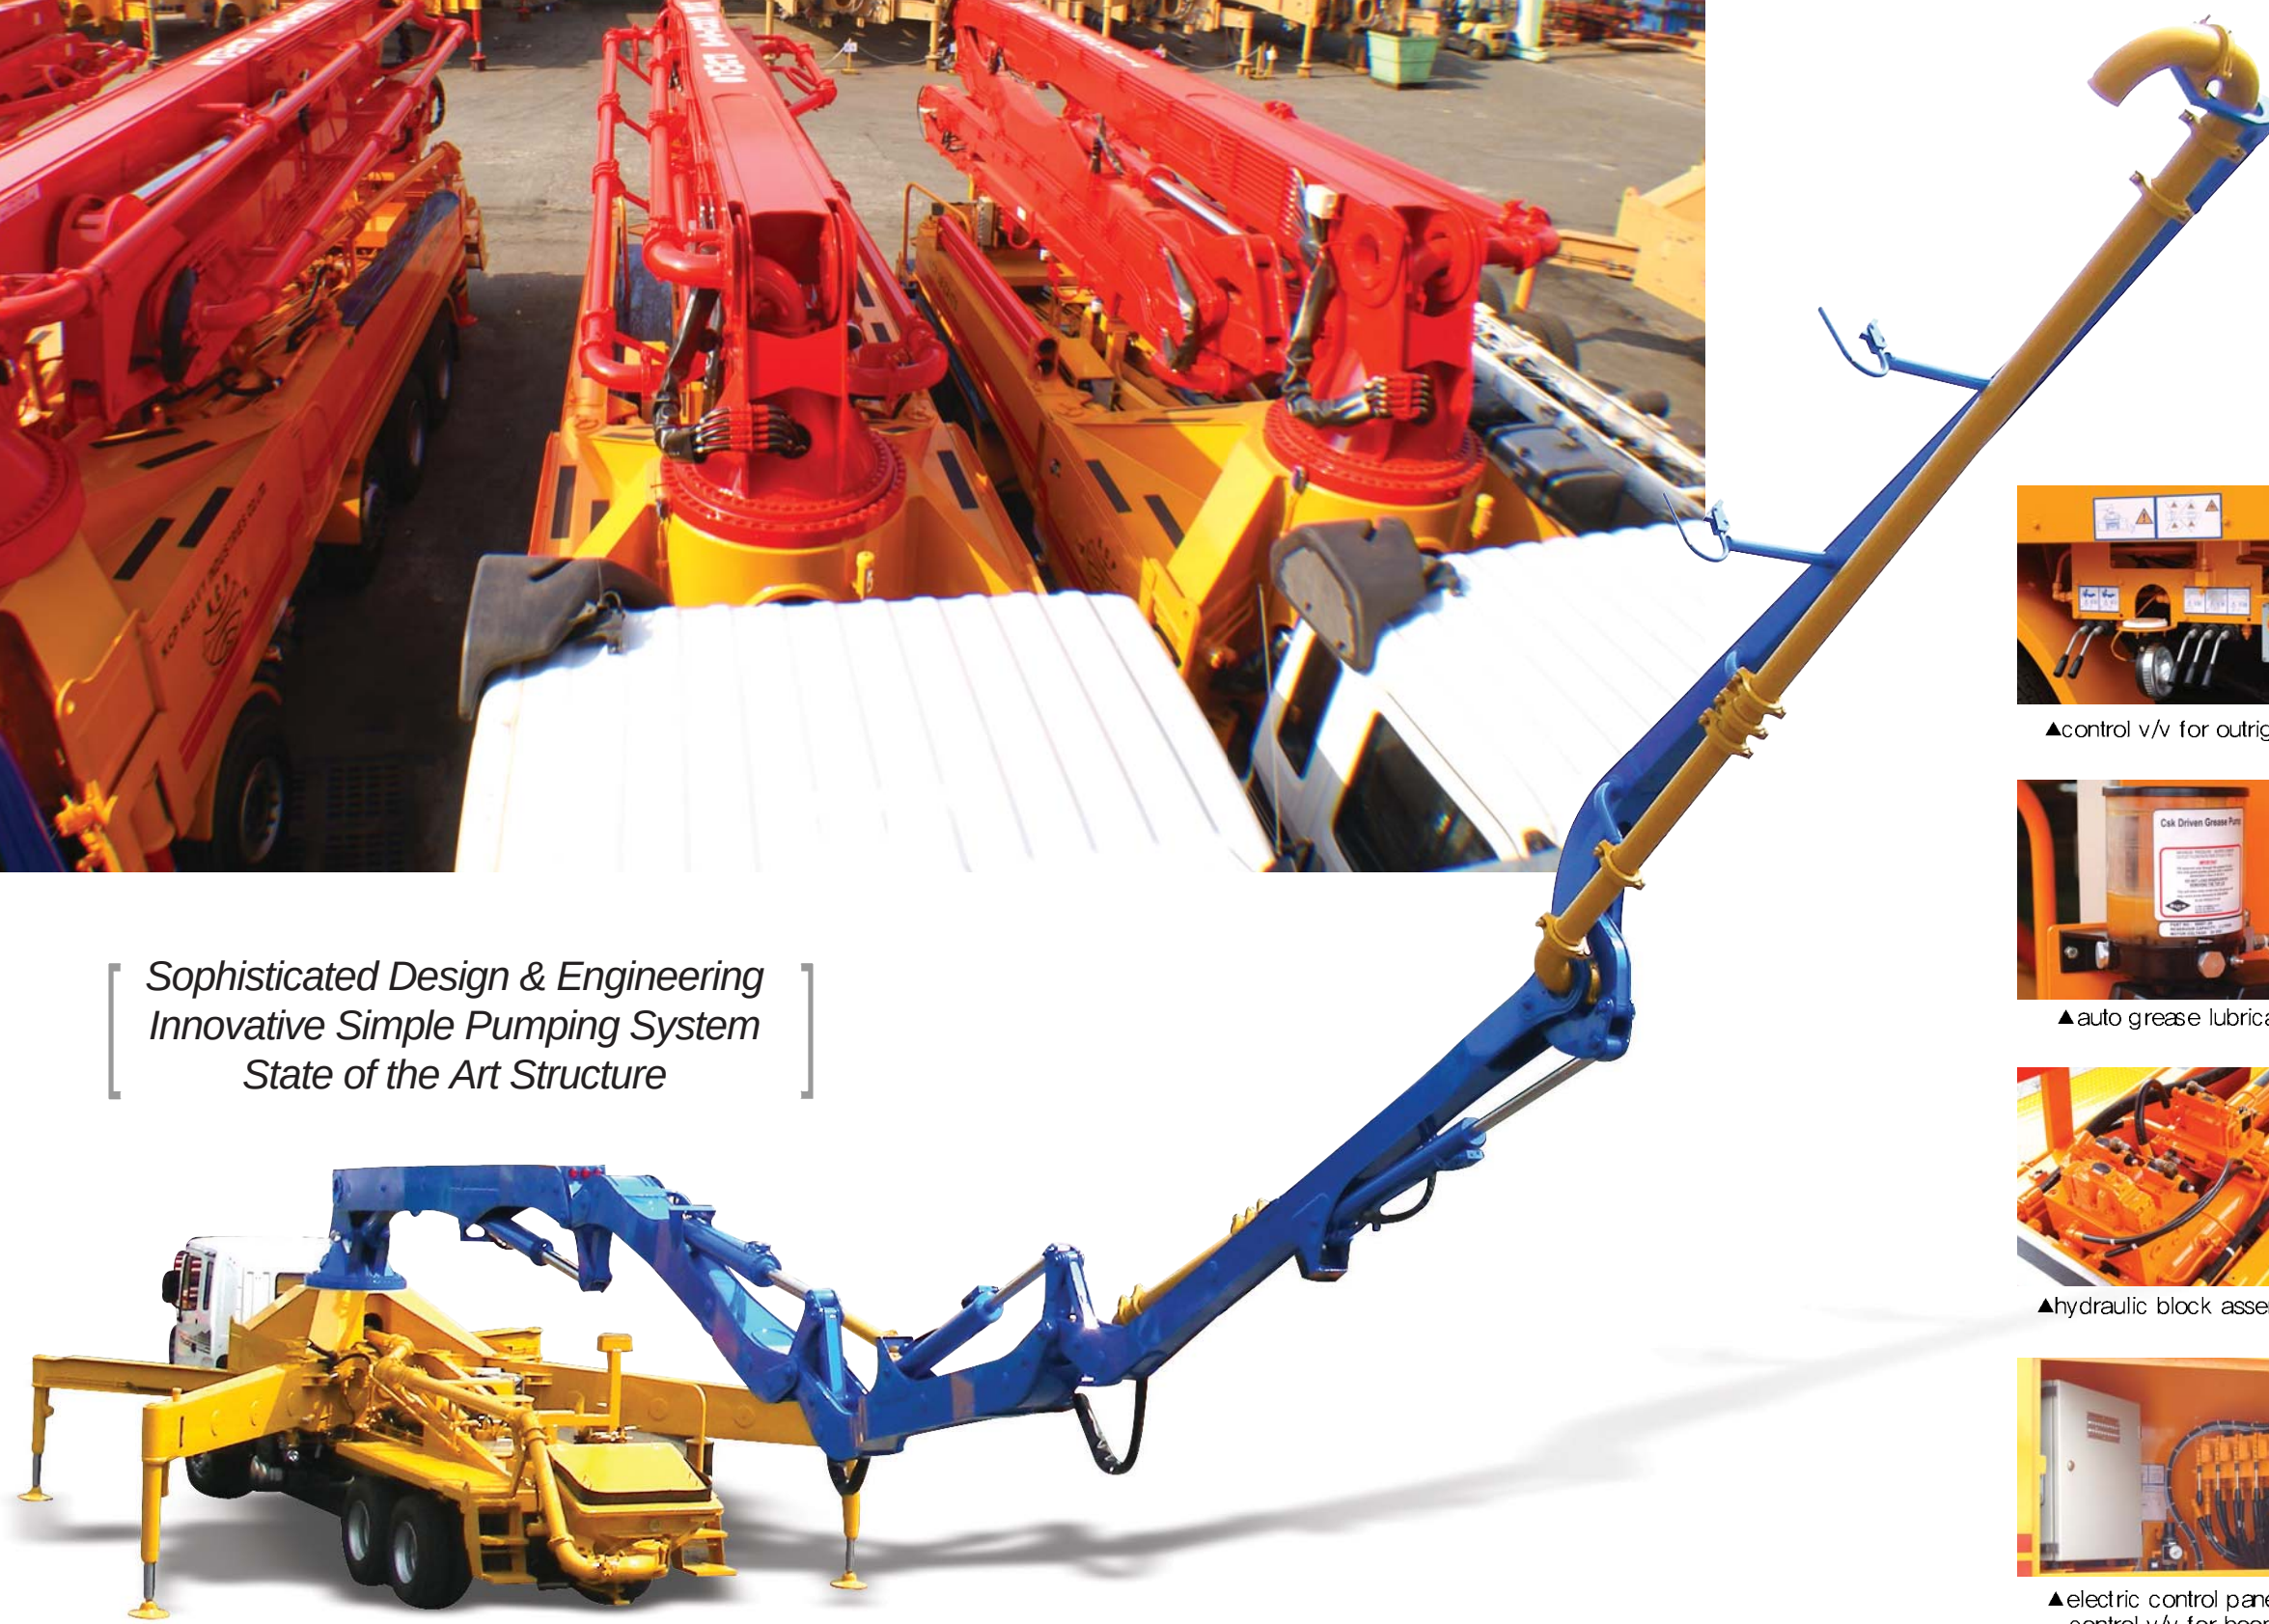

▲wireless remote controller



▲control v/v for outrigger



▲switch box



▲auto grease lubricant



▲high pressure water pump



▲hydraulic block assembly



▲large capacity hopper



▲electric control panel & control v/v for boom



▲large capacity oil cooler

Our Pride...

KCP24ZX100

■ Boom specifications

Vertical reach	23.2 M	(63' 3")
Horizontal reach	19.8 M	(54' 2")
Unfolding height	5.4 M	(14' 10")
Section articulation	94° / 180° / 260° / 250°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	yes	
End hose length	3 M	(10')
Outrigger spread-front	5.6 M	(15' 4")
Outrigger spread-rear	2.65 M	(7' 3")
Max. outrigger weight	11000 kg	(24280 lbs)

■ Pump specifications


Maximum output	90 m³/h	(118 yd³/h)
Concrete cylinder	Ø230 X 1400mm (9" X 55")	
Stroke per minute	28	
Concrete pressure	69 bar	(1000 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø230 X Ø180 (8" X 7")	
Hydraulic pump	Kawasaki K3V180S	
Cycling system	Hydraulic with manual overrides	
Max aggregate size	60 mm	(2 1/2")

* Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANIA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

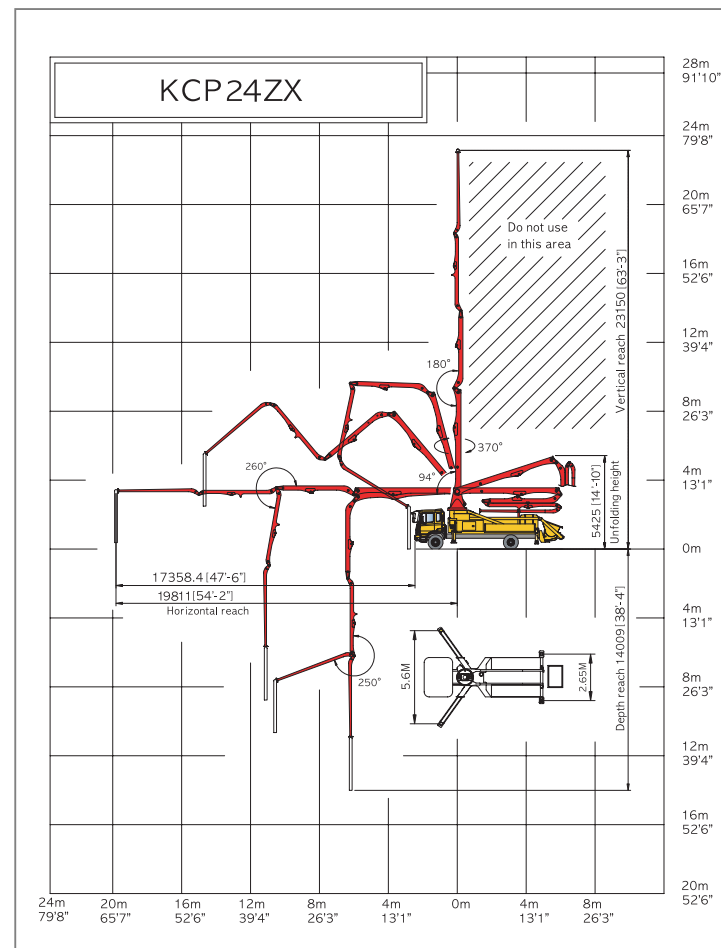

■ Weight diagram

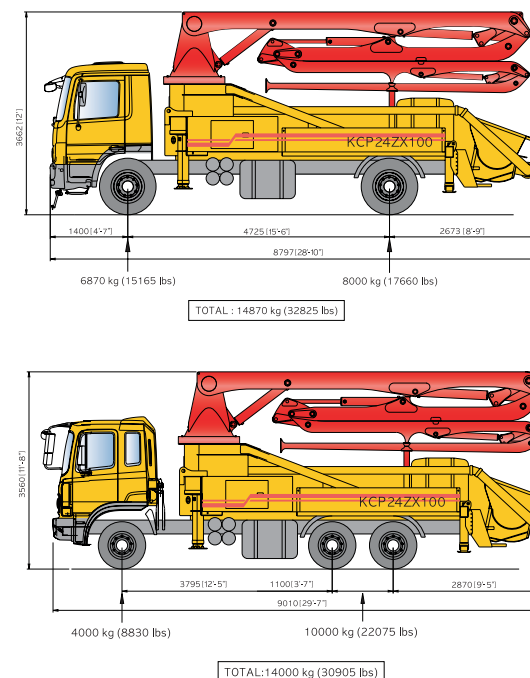

* Photos and drawings are for illustrative purpose only.
 * Dimension will vary with different truck makers, models and specifications.
 * Right to make technical amendments reserved.

Our Pride...

KCP28ZX120

■ Boom specifications

Vertical reach	27.8 M	(91' 1")
Horizontal reach	24 M	(78' 9")
Reach from front of truck	21.4 M	(70' 4")
Unfolding height	6.5 M	(21' 4")
Section articulation	96° / 180° / 260° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	3 M	(10')
Outrigger spread-front	5.8 M	(19')
Outrigger spread-rear	6.15 M	(9')
Max.outrigger weight	13,000 kg	(28700 lbs)

■ Pump specifications


Maximum output	105 m³/h	(137 yd³/h)
Concrete cylinder	Ø230×1800mm (9"×71")	
Stroke per minute	23.5	
Concrete pressure(rod)	69 bar	(1000 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180 (8"×7")	
Hydraulic pump	Kawasaki K3V180S (Rexroth A11VO190)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

* Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANIA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

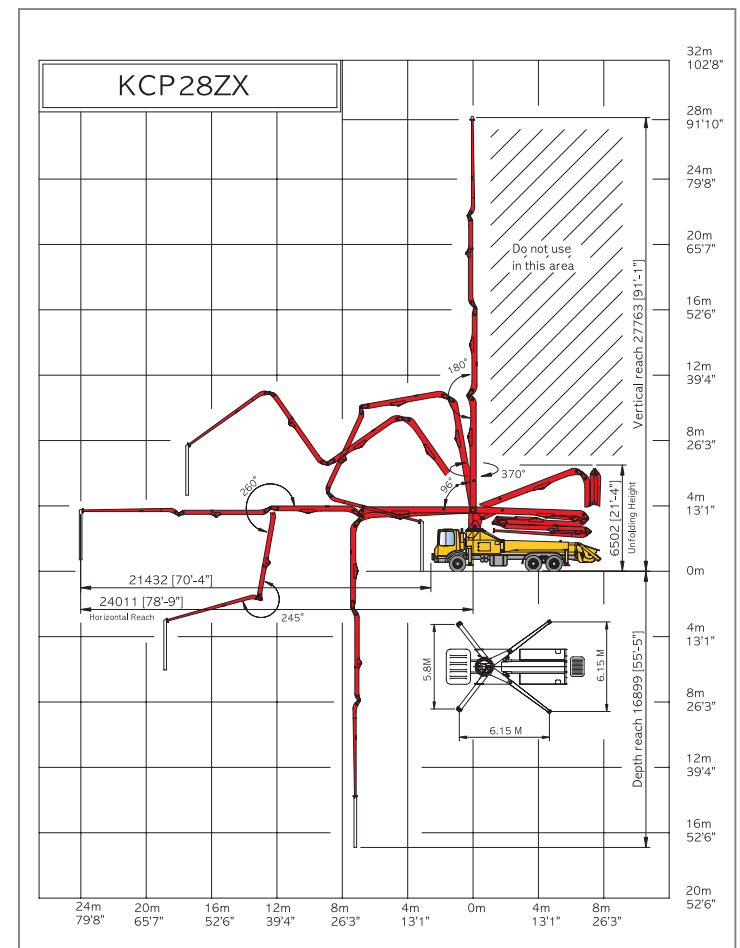

■ Weight diagram

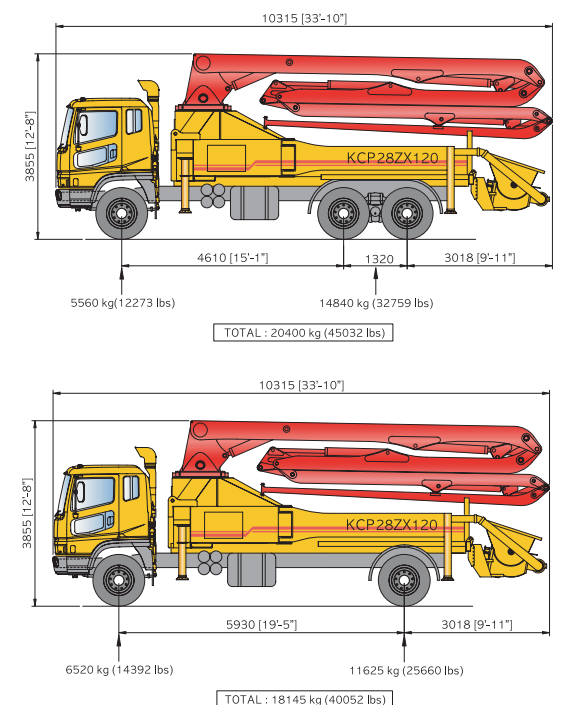

* Photos and drawings are for illustrative purpose only.
 * Dimension will vary with different truck makers, models and specifications.
 * Right to make technical amendments reserved.

Our Pride...

KCP32RZ5170

■ Boom specifications

Vertical reach	31.6 M	(103' 7")
Horizontal reach	27.7 M	(91')
Reach from front of truck	25.4 M	(83' 3")
Unfolding height	5.8 M	(19' 1")
Section articulation	90° / 180° / 240° / 220° / 220°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	3 M	(10')
Outrigger spread-front	6.18 M	(20' 3")
Outrigger spread-rear	7.15 M	(23' 5")
Max.outrigger weight	20,500 kg	(45250 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83')
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7')
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

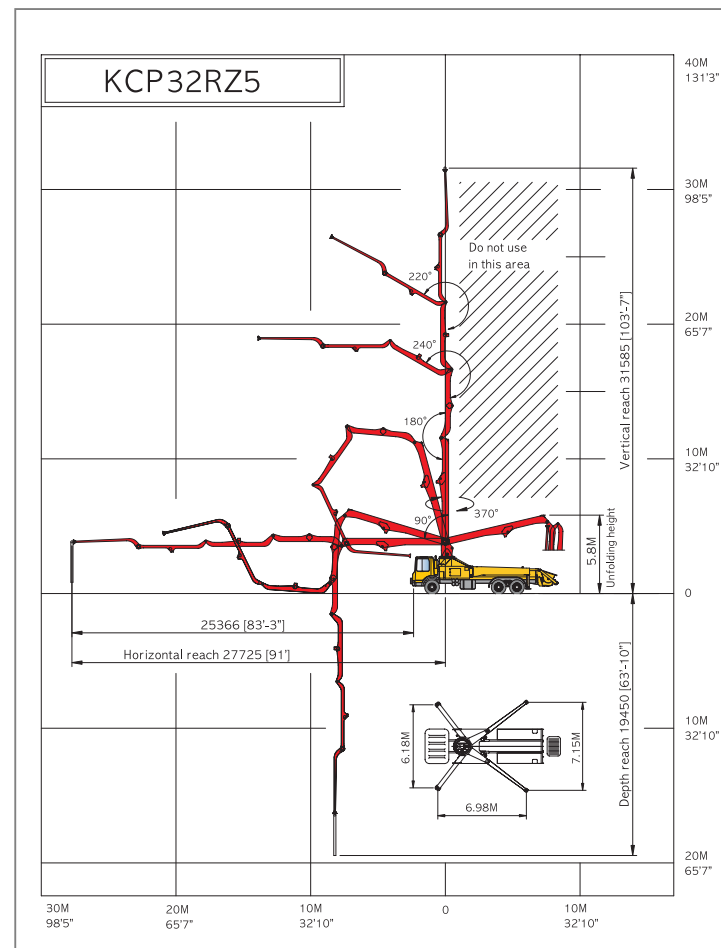

■ Weight diagram

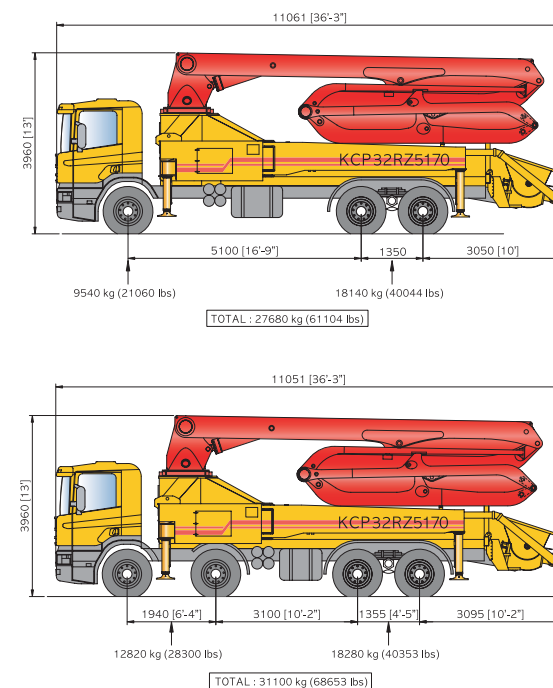

※ Photos and drawings are for illustrative purpose only.
 ※ Dimension will vary with different truck makers, models and specifications.
 ※ Right to make technical amendments reserved.

Our Pride...

KCP36RX170

■ Boom specifications

Vertical reach	36 M	(118' 1")
Horizontal reach	32.2 M	(105' 8")
Reach from front of truck	29.8 M	(97' 8")
Unfolding height	9.1 M	(29' 10")
Section articulation	94° / 180° / 240° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	6.18 M	(20' 3")
Outrigger spread-rear	7.15 M	(23' 5")
Max.outrigger weight	20,500 kg	(45250 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83')
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7')
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

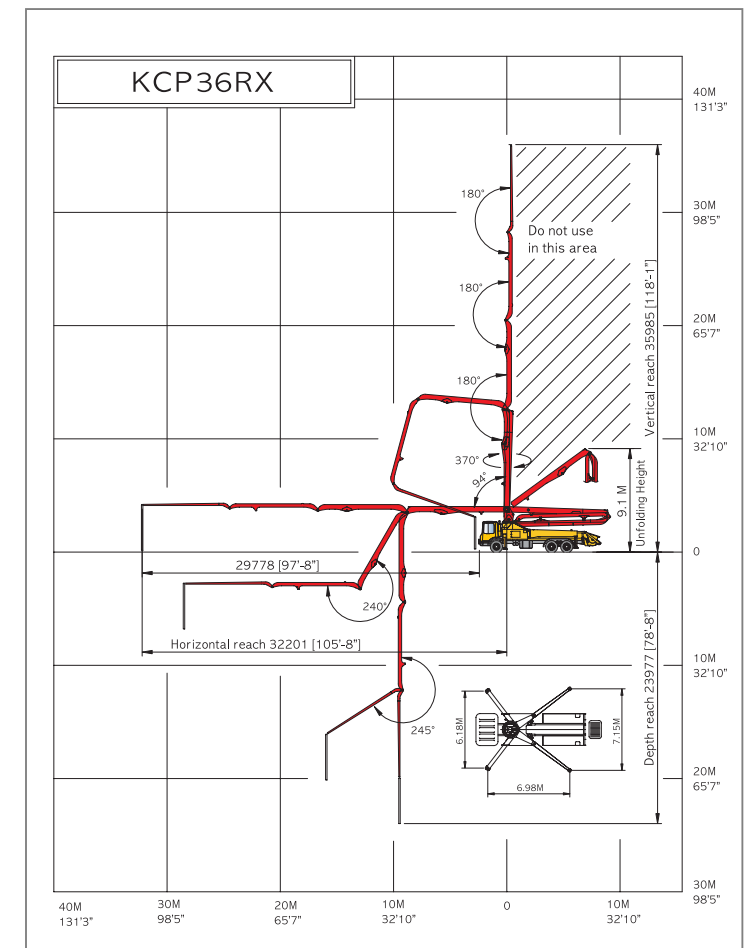

■ Weight diagram

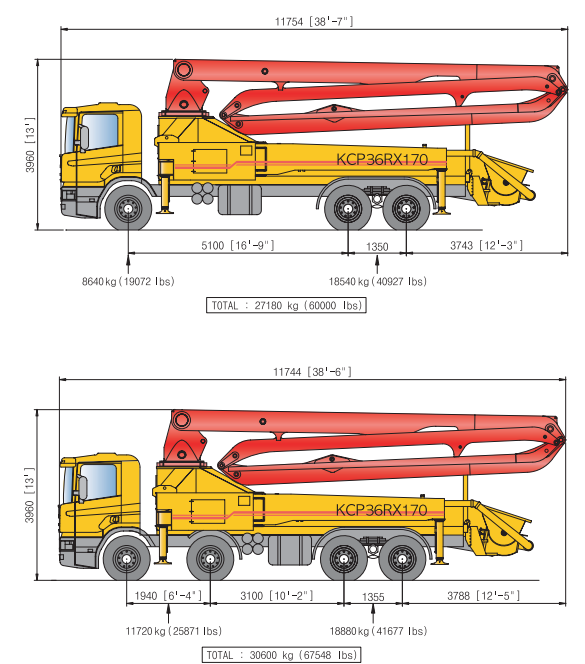

※ Photos and drawings are for illustrative purpose only.
 ※ Dimension will vary with different truck makers, models and specifications.
 ※ Right to make technical amendments reserved.

Our Pride...

KCP36ZX170

■ Boom specifications

Vertical reach	35.7 M	(117' 2")
Horizontal reach	32 M	(105')
Reach from front of truck	29.5 M	(96' 11")
Unfolding height	9.3 M	(30' 6")
Section articulation	94° / 180° / 250° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	6.18 M	(20' 3")
Outrigger spread-rear	7.15 M	(23' 5")
Max.outrigger weight	20,500 kg	(45250 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83')
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7')
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANIA, VOLVO, MERCEDES BENZ,
MAN, IVECO, DAF, MAZ, ASTRA, MR MACK,
AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

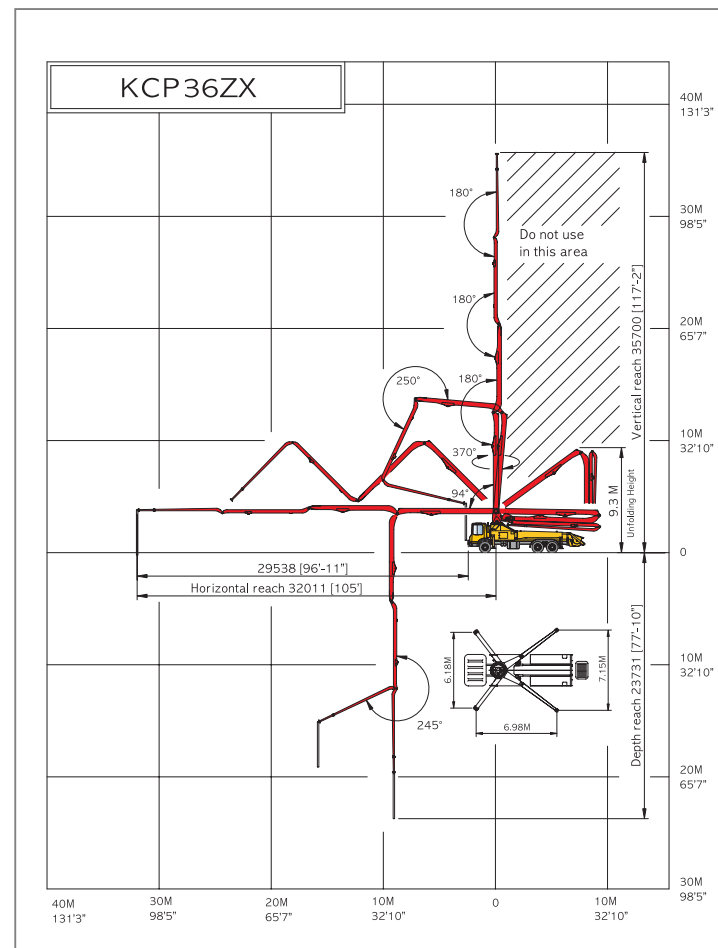

■ Weight diagram

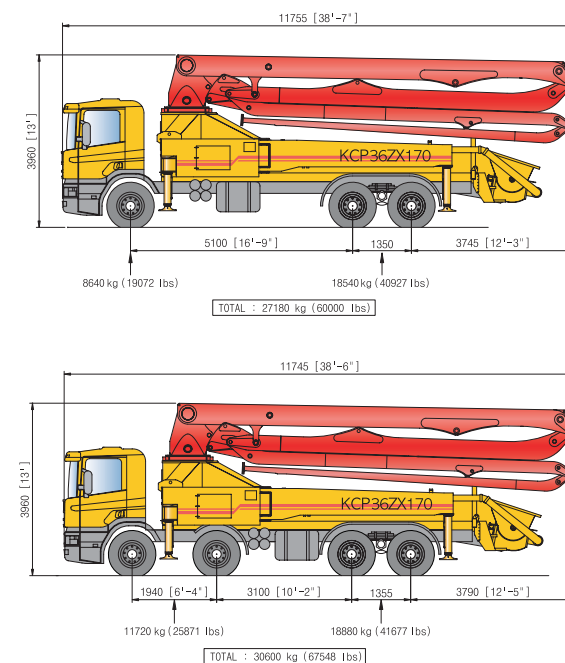

※ Photos and drawings are for illustrative purpose only.
※ Dimension will vary with different truck makers, models and specifications.
※ Right to make technical amendments reserved.

Our Pride...

KCP38RX170

■ Boom specifications

Vertical reach	37.9 M	(124' 3")
Horizontal reach	34 M	(111' 8")
Reach from front of truck	31.6 M	(103' 9")
Unfolding height	9.4 M	(30' 10")
Section articulation	94° / 180° / 240° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	6.18M	(20' 3")
Outrigger spread-rear	7.15M	(23' 5")
Max.outrigger weight	21,500 kg	(47460 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83')
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7')
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANIA, VOLVO, MERCEDES BENZ,
MAN, IVECO, DAF, MAZ, ASTRA, MR MACK,
AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

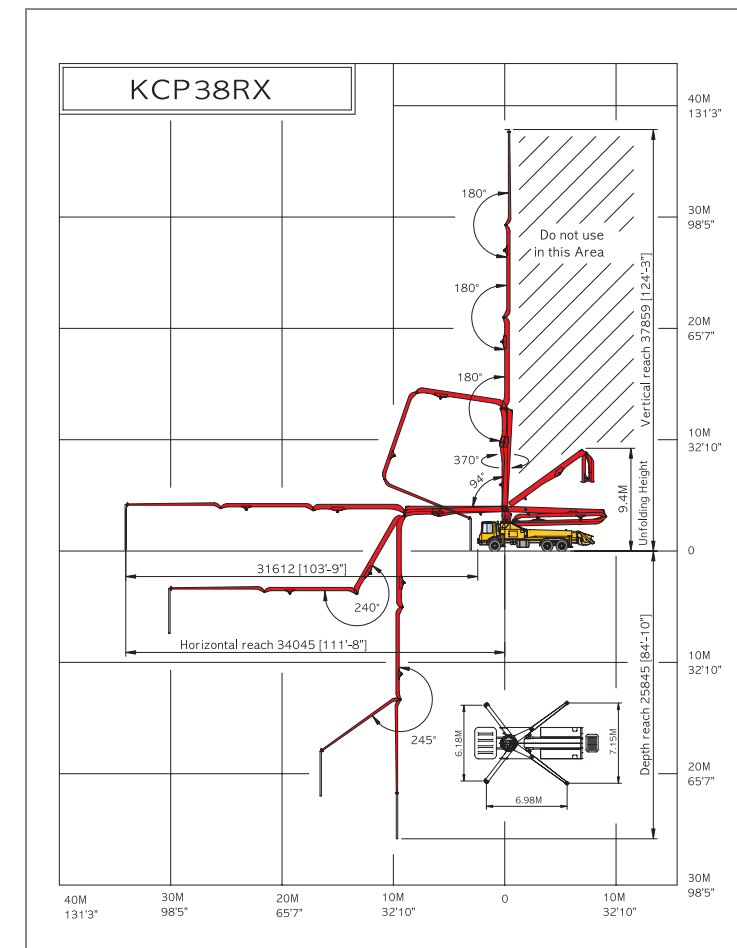

■ Weight diagram

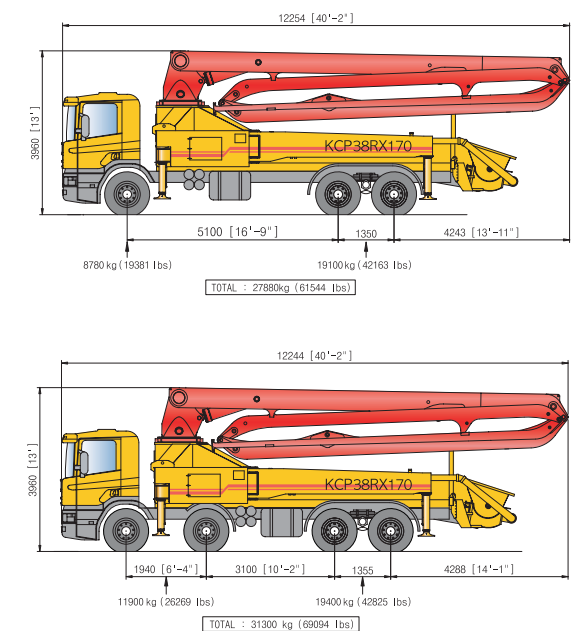

※ Photos and drawings are for illustrative purpose only.
※ Dimension will vary with different truck makers, models and specifications.
※ Right to make technical amendments reserved.

Our Pride...

KCP38ZX170

■ Boom specifications

Vertical reach	37.8 M	(123' 9")
Horizontal reach	34 M	(111' 7")
Reach from front of truck	31.6 M	(103' 6")
Unfolding height	9.5 M	(30' 10")
Section articulation	94° / 180° / 250° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	6.18 M	(20' 3")
Outrigger spread-rear	7.15 M	(23' 5")
Max.outrigger weight	21,500 kg	(47460 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83')
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ,
MAN, IVECO, DAF, MAZ, ASTRA, MR MACK,
AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

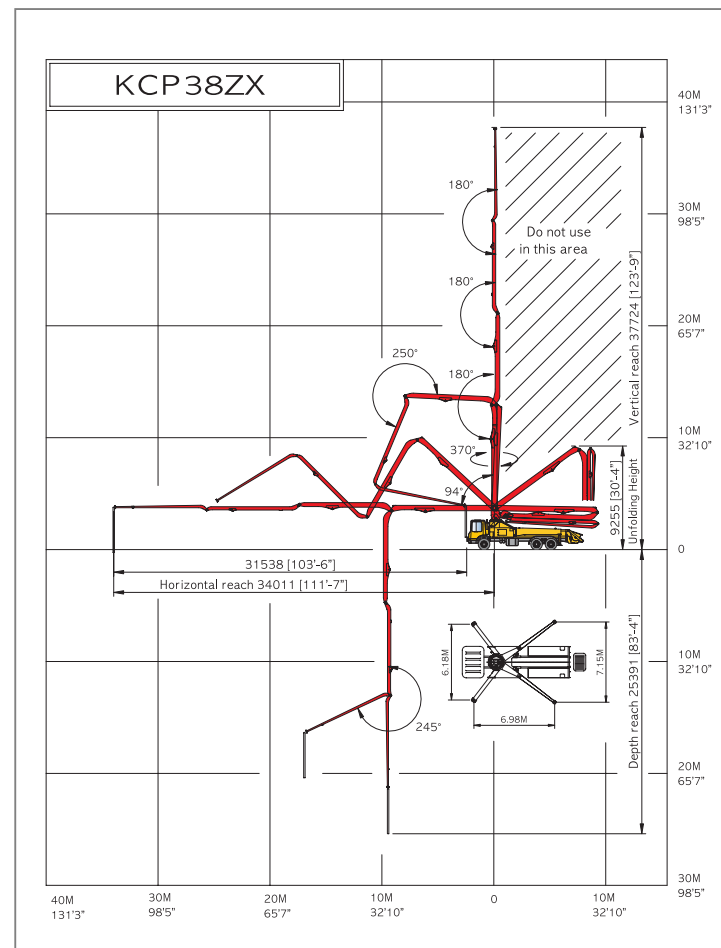

■ Weight diagram

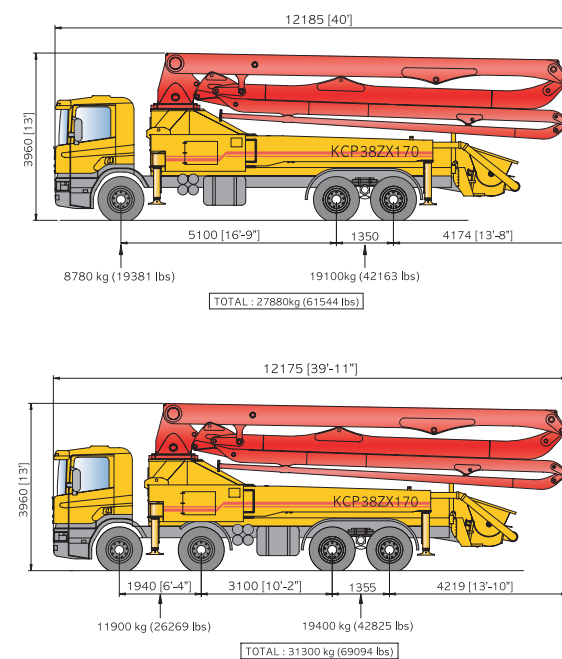

※ Photos and drawings are for illustrative purpose only.
※ Dimension will vary with different truck makers, models and specifications.
※ Right to make technical amendments reserved.

Our Pride...

KCP40RX170

■ Boom specifications

Vertical reach	39.9 M	(130' 10")
Horizontal reach	35.7 M	(117' 2")
Reach from front of truck	32.8 M	(107' 9")
Unfolding height	9.3 M	(30' 7")
Section articulation	94° / 180° / 240° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	6.18 M	(20' 3")
Outrigger spread-rear	8.1 M	(26' 7")
Max.outrigger weight	22,500 kg	(49670 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83')
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ,
MAN, IVECO, DAF, MAZ, ASTRA, MR MACK,
AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

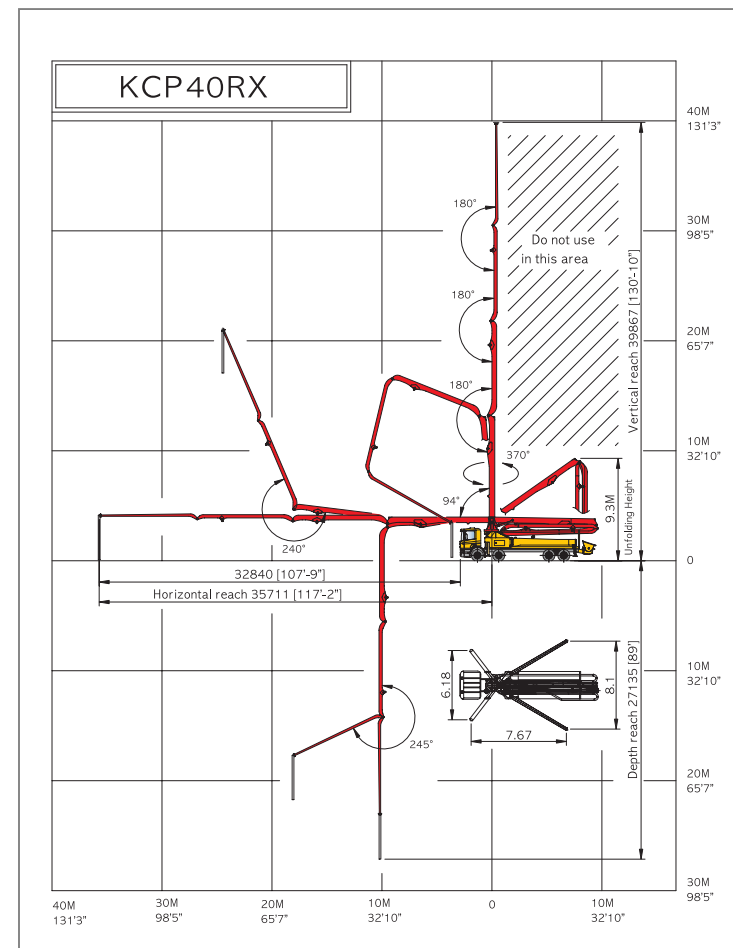

■ Weight diagram

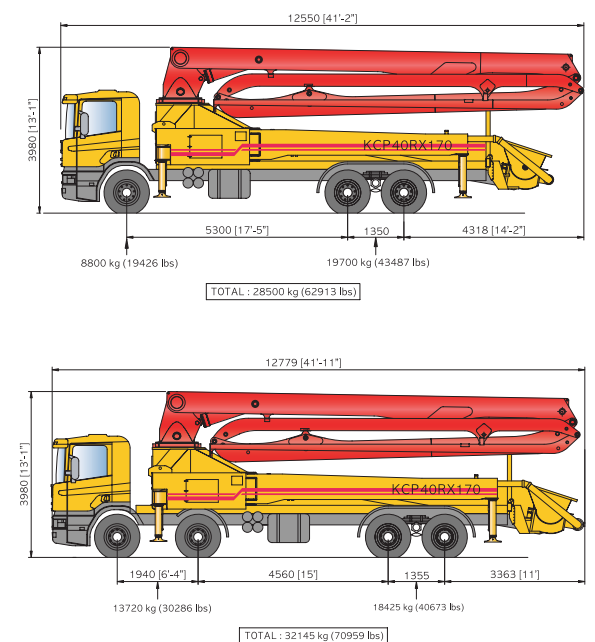

※ Photos and drawings are for illustrative purpose only.
※ Dimension will vary with different truck makers, models and specifications.
※ Right to make technical amendments reserved.

Our Pride...

KCP45ZX170

■ Boom specifications

Vertical reach	44.3 M	(145' 5")
Horizontal reach	40.5 M	(132' 11")
Reach from front of truck	37.6 M	(123' 6")
Unfolding height	8.6 M	(28' 3")
Section articulation	92° / 180° / 225° / 180° / 245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	7.24 M	(19' 10")
Outrigger spread-rear	9.98 M	(22' 6")
Max.outrigger weight	28,000 kg	(61810 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83")
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ,
MAN, IVECO, DAF, MAZ, ASTRA, MR MACK,
AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

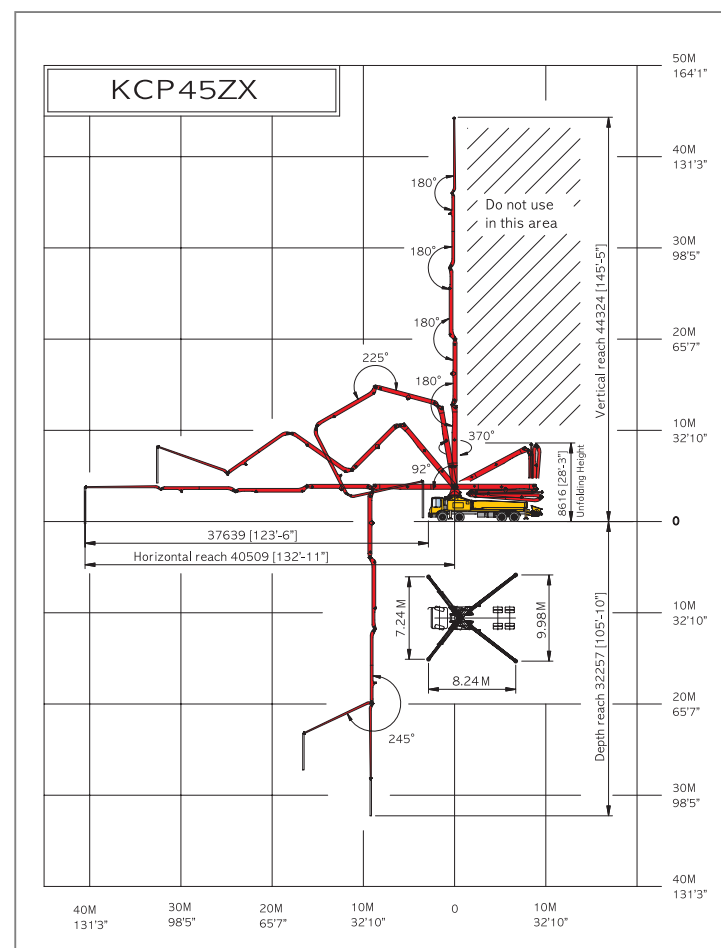

■ Weight diagram

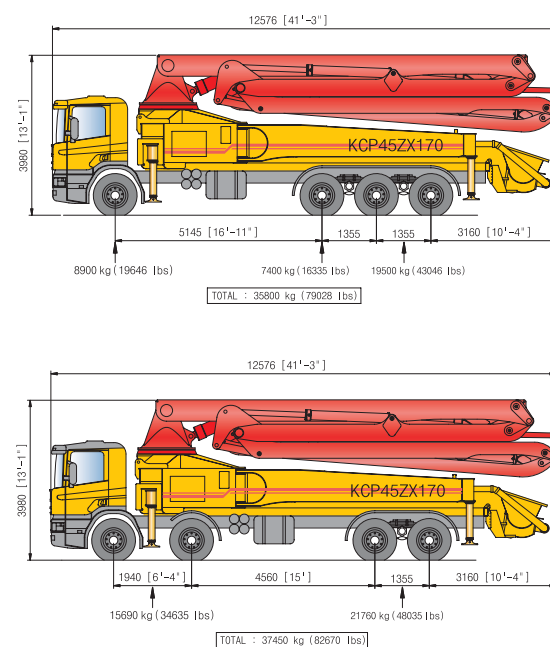

※ Photos and drawings are for illustrative purpose only.
※ Dimension will vary with different truck makers, models and specifications.
※ Right to make technical amendments reserved.

Our Pride...

KCP48ZX170

■ Boom specifications

Vertical reach	47.1 M	(154' 6")
Horizontal reach	43.3 M	(142')
Reach from front of truck	40.2 M	(132')
Unfolding height	10.6 M	(34' 8")
Section articulation	92° / 180° / 225° / 180° / 210°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	8.87 M	(29' 1")
Outrigger spread-rear	10.1 M	(33')
Max.outrigger weight	33,500 kg	(73950 lbs)

■ Pump specifications

Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83")
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ 48ZX200 – Optional

Maximum output	200 m³/h	(261 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	25.6	
Concrete pressure(rod)	87.5 bar	(1270 psi)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Kawasaki K3V180DT (Rexroth A20VLO190)	


■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ,
MAN, IVECO, DAF, MAZ, ASTRA, MR MACK,
AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

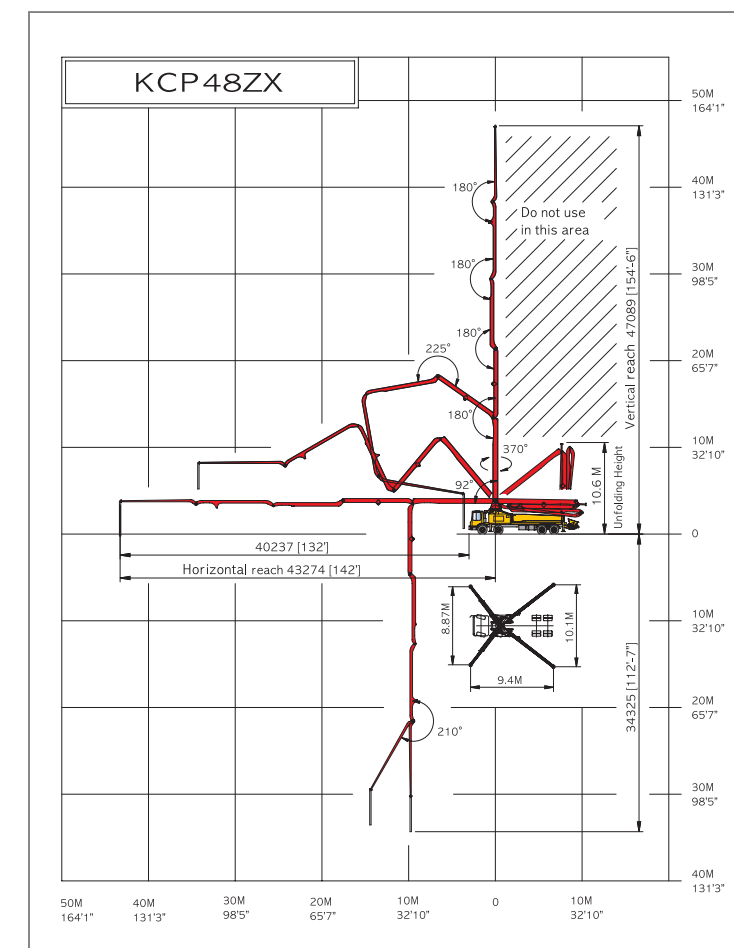

■ Weight diagram

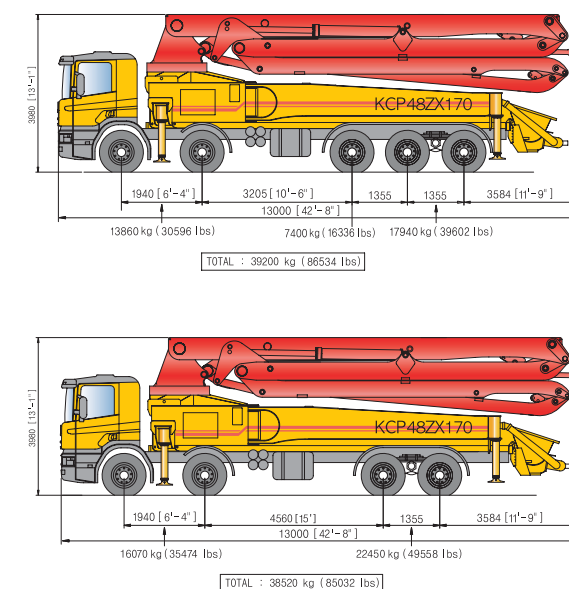

※ Photos and drawings are for illustrative purpose only.
※ Dimension will vary with different truck makers, models and specifications.
※ Right to make technical amendments reserved.

Our Pride...

KCP50ZX170

■ Boom specifications

Vertical reach	49.4 M	(162' 2")
Horizontal reach	45.6 M	(149' 8")
Reach from front of truck	42.6 M	(139' 8")
Unfolding height	10.6 M	(34' 8")
Section articulation	92° / 180° / 225° / 180° / 210°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	9.1M	(29' 10")
Outrigger spread-rear	9.95 M	(32' 8")
Max.outrigger weight	33,500 kg	(73950 lbs)

■ Pump specifications

Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83")
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ 50ZX200 – Optional

Maximum output	200 m³/h	(261 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	25.6	
Concrete pressure(rod)	87.5 bar	(1270 psi)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Kawasaki K3V180DT (Rexroth A20VLO190)	



■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

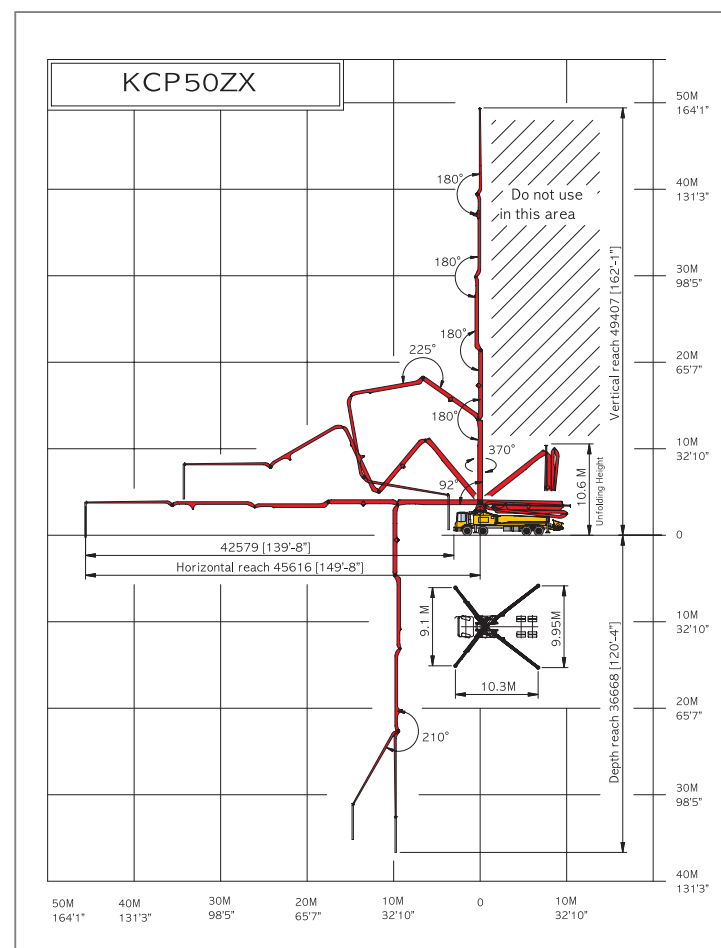

■ Weight diagram

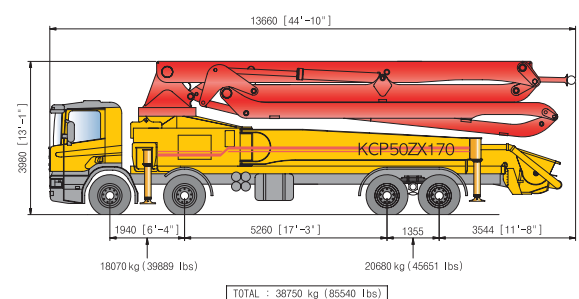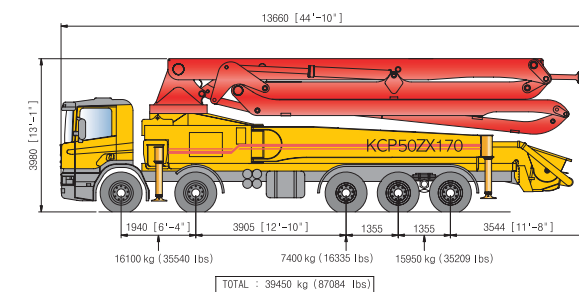

※ Photos and drawings are for illustrative purpose only.
 ※ Dimension will vary with different truck makers, models and specifications.
 ※ Right to make technical amendments reserved.

Our Pride...

KCP52ZX200

■ Boom specifications

Vertical reach	51.3 M	(168' 5")
Horizontal reach	47.5 M	(155' 11")
Reach from front of truck	44.5 M	(145' 11")
Unfolding height	11.3 M	(36' 11")
Section articulation	92° / 180° / 225° / 180° / 210°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	9.1 M	(29' 10")
Outrigger spread-rear	10.6 M	(34' 10")
Max.outrigger weight	33,500 kg	(73950 lbs)

■ Pump specifications

Maximum output	200 m³/h	(261 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	25.6	
Concrete pressure(rod)	87.5 bar	(1270 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Rexroth A20VLO190 (Kawasaki K3V180DT)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※ Maximum theoretical values listed.


■ 52ZX225 – Optional

Maximum output	225 m³/h	(300 yd³/h)
Stroke per minute	29	
Hydraulic pump	Rexroth A20VLO190	



■ Truck mounted specifications

Available SCANA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

■ Working diagram

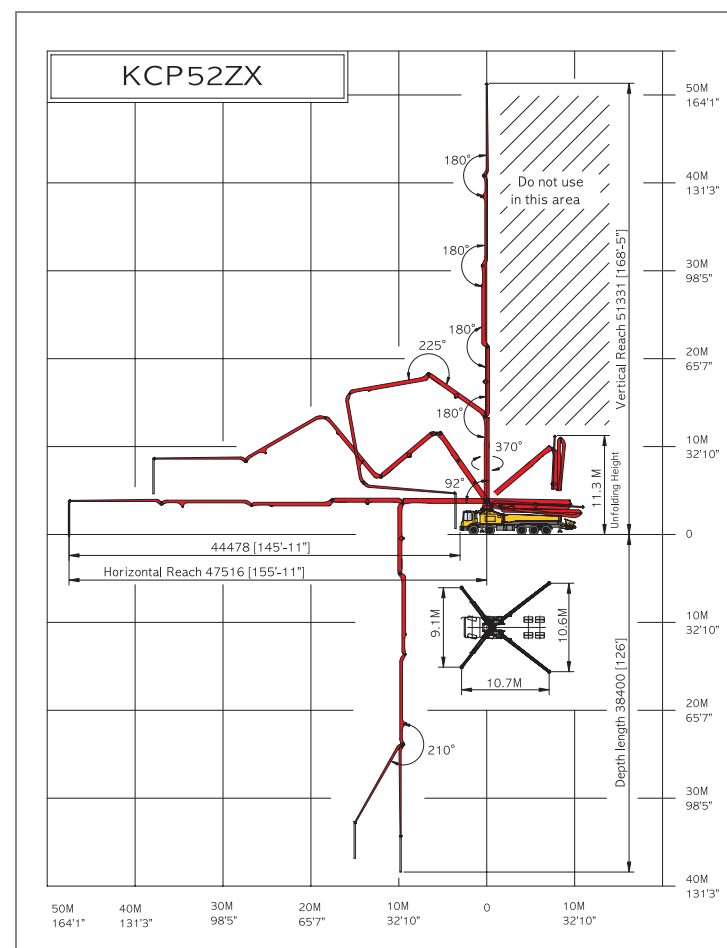

■ Weight diagram

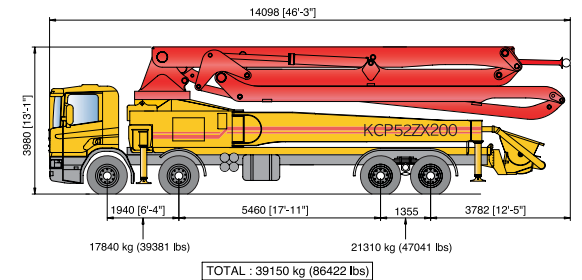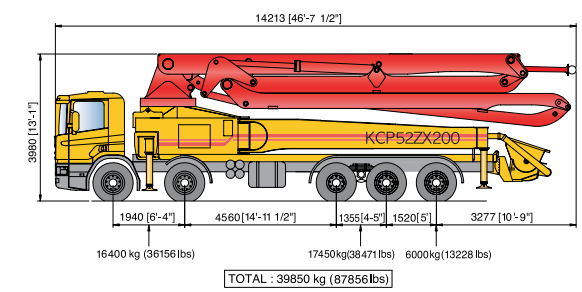

※ Photos and drawings are for illustrative purpose only.
 ※ Dimension will vary with different truck makers, models and specifications.
 ※ Right to make technical amendments reserved.

Our Pride...

KCP60ZS225



■ Boom specifications

Vertical reach	59.5 M	(195' 4")
Horizontal reach	55.9 M	(183' 4")
Reach from front of truck	52.9 M	(173' 6")
Unfolding height	12.4 M	(40' 10")
Section articulation	92 ° /180 ° /215 ° /180 ° /210 °	
Rotation	370 °	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	11.8 M	(38' 9")
Outrigger spread-rear	16 M	(52' 8")
Max.outrigger weight	45,000 kg	(99340 lbs)

■ Pump specifications

Maximum output	225 m³/h	(300 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	29	
Concrete pressure(rod)	87.5 bar	(1270 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Rexroth A2OVLO190	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")


※ Maximum theoretical values listed.

■ Truck mounted specifications


Available SCANIA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

KCP CONCRETE PUMPS

■ Working diagram

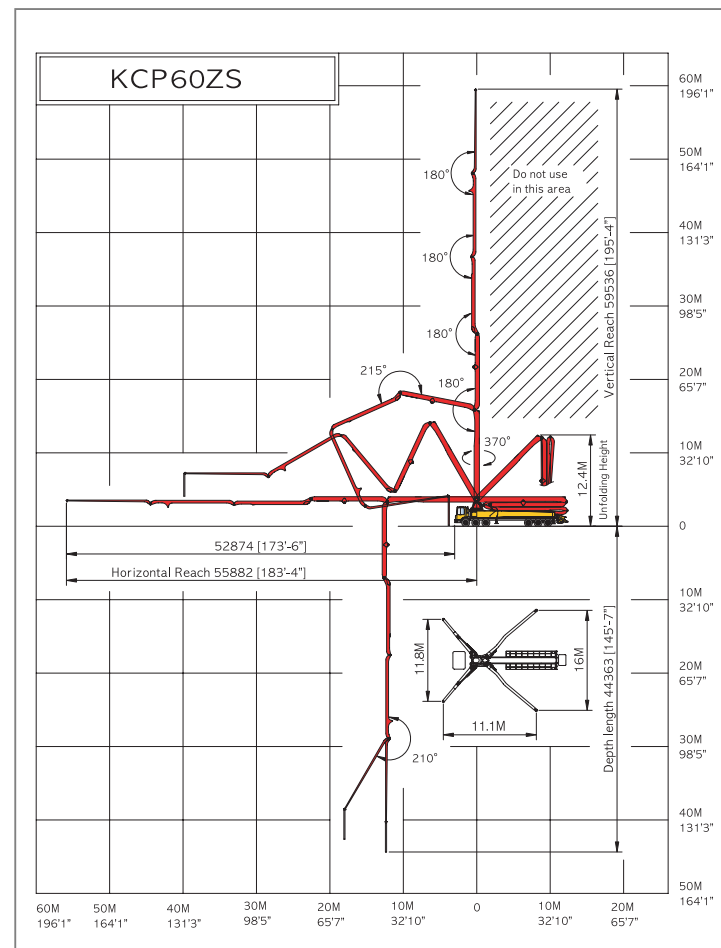

■ Weight diagram

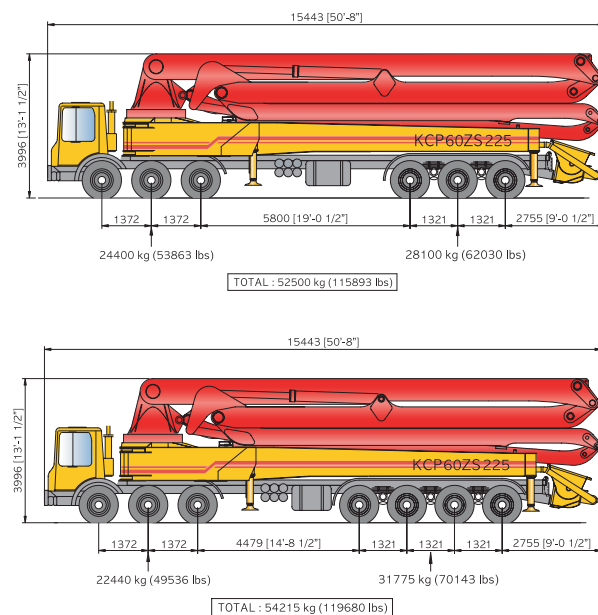

※ Photos and drawings are for illustrative purpose only.
 ※ Dimension will vary with different truck makers, models and specifications.
 ※ Right to make technical amendments reserved.

Our Pride...

KCP65ZS225



■ Boom specifications

Vertical reach	64.4 M	(211' 2")
Horizontal reach	60.6 M	(198' 11")
Reach from front of truck	57.4 M	(188' 2")
Unfolding height	14.5 M	(47' 7")
Section articulation	92 ° /180 ° /215 ° /180 ° /210 °	
Rotation	370 °	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	12.8 M	(41' 11")
Outrigger spread-rear	13.8 M	(45' 4")
Max.outrigger weight	65,000 kg	(143500 lbs)

■ Pump specifications

Maximum output	225 m³/h	(300 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	29	
Concrete pressure(rod)	87.5 bar	(1270 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Rexroth A2OVLO190	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")


※ Maximum theoretical values listed.

■ Truck mounted specifications


Available SCANIA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, AMERICAN LAFRANCE, HYUNDAI, DAEWOO ...

KCP HEAVY INDUSTRIES CO.,LTD
 KCP has the innovation to break the limit

■ Working diagram

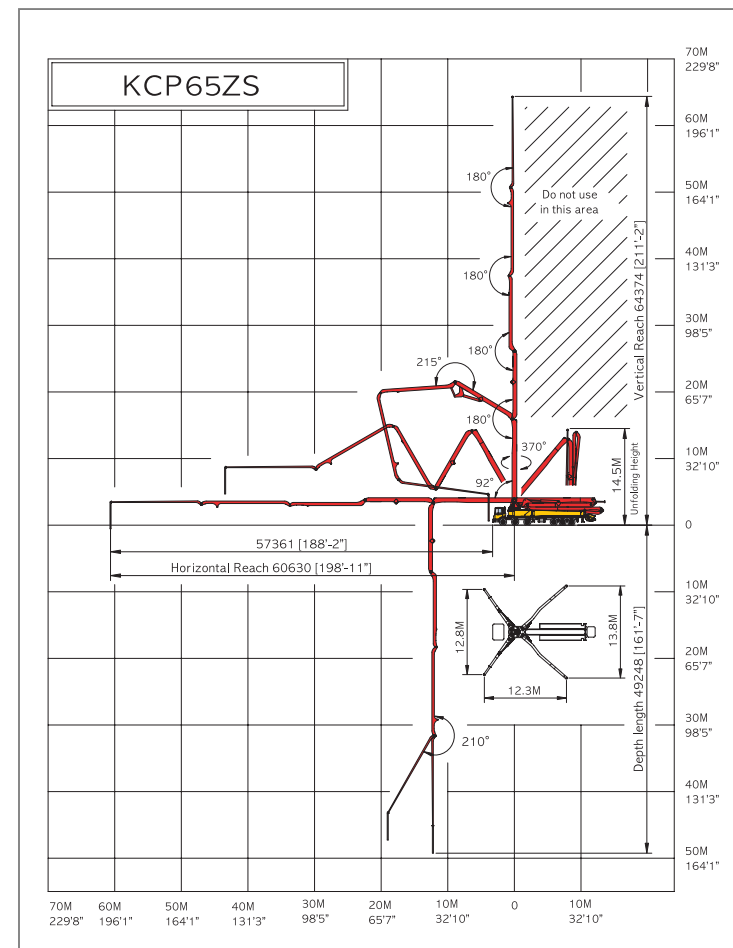


■ Weight diagram

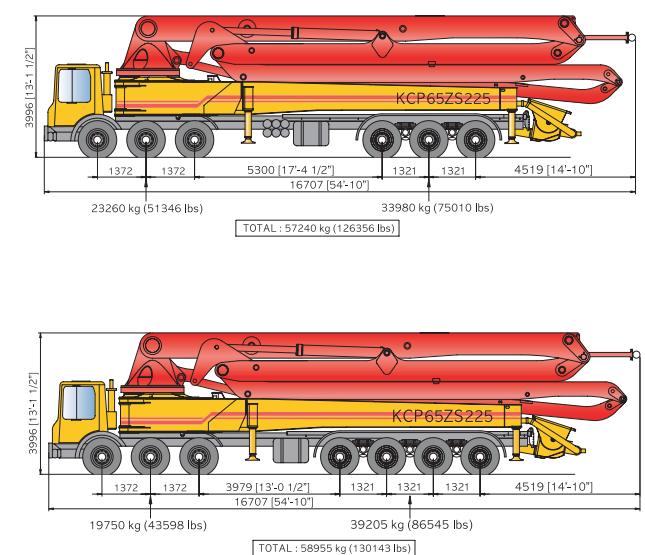

※ Photos and drawings are for illustrative purpose only.
 ※ Dimension will vary with different truck makers, models and specifications.
 ※ Right to make technical amendments reserved.



Pioneer of Concrete Pumping!

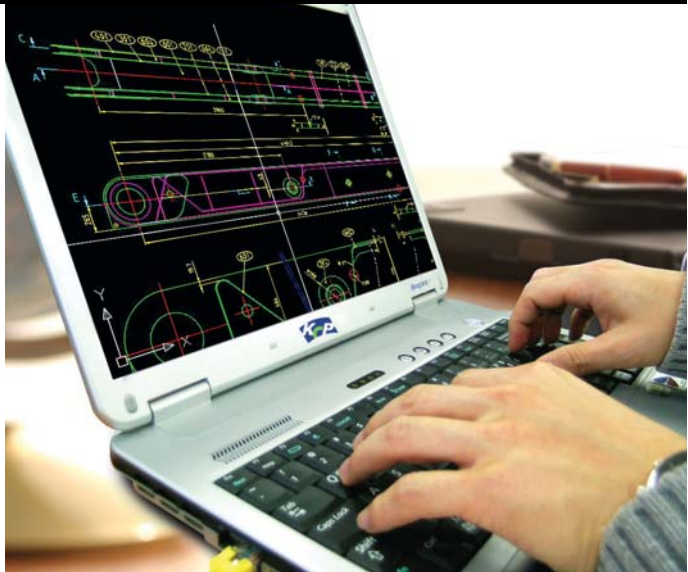

King of Concrete Pumps!

