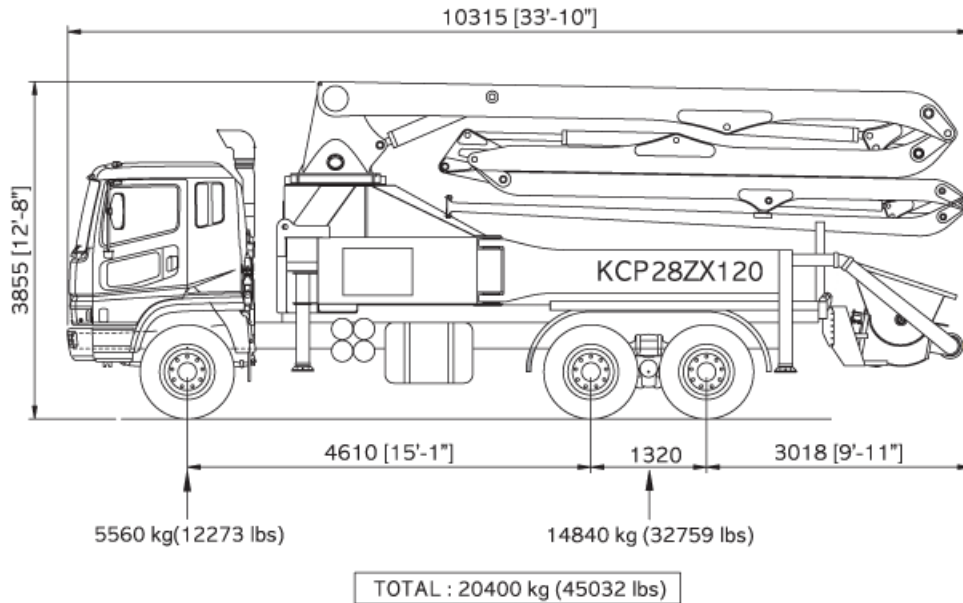


Our Pride...

KCP28ZX120**■ Boom specifications**

Vertical reach	27.8 M	(91' 1")
Horizontal reach	24 M	(78' 9")
Reach from front of truck	21.4 M	(70' 4")
Unfolding height	6.5 M	(21' 4")
Section articulation	96 ° / 180 ° / 260 ° / 245 °	
Rotation	370 °	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	3 M	(10')
Outrigger spread-front	5.8 M	(19')
Outrigger spread-rear	6.15 M	(9')
Max.outrigger weight	13,000 kg	(28700 lbs)


■ Pump specifications

Maximum output	105 m ³ /h	(137 yd ³ /h)
Concrete cylinder	Ø230×1800mm	(9"×71")
Stroke per minute	23.5	
Concrete pressure(rod)	69 bar	(1000 psi)
Hopper capacity	0.6 m ³	(21 ft ³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V180S (Rexroth A11VO190)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

* Photos and drawings are for illustrative purpose only.

* Dimension will vary with different truck makers, models and specifications.

* Right to make technical amendments reserved.

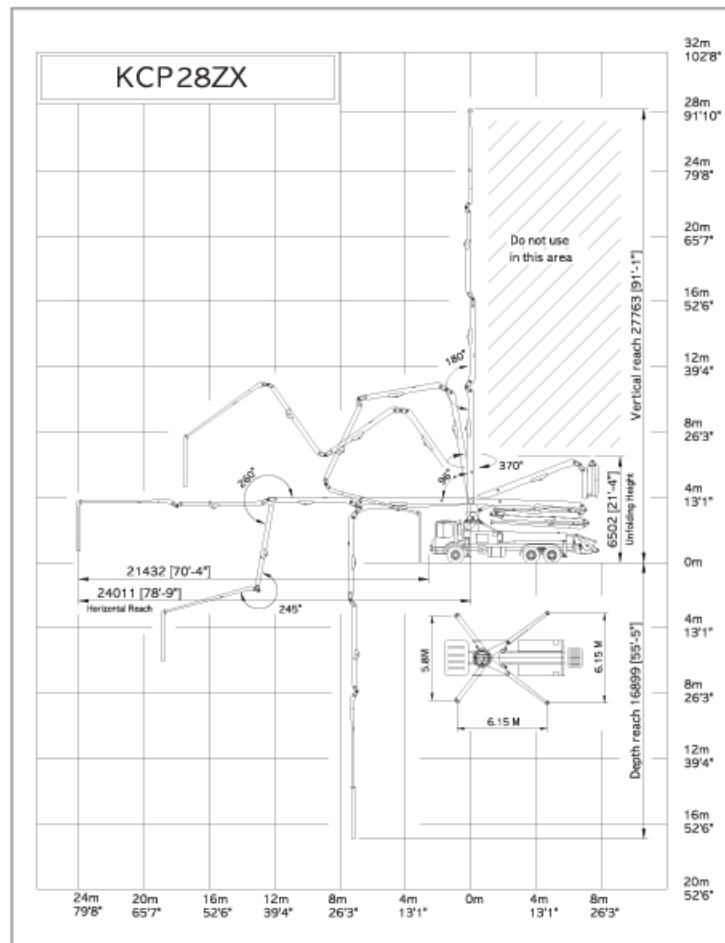■ Working diagram

* Maximum theoretical values listed.