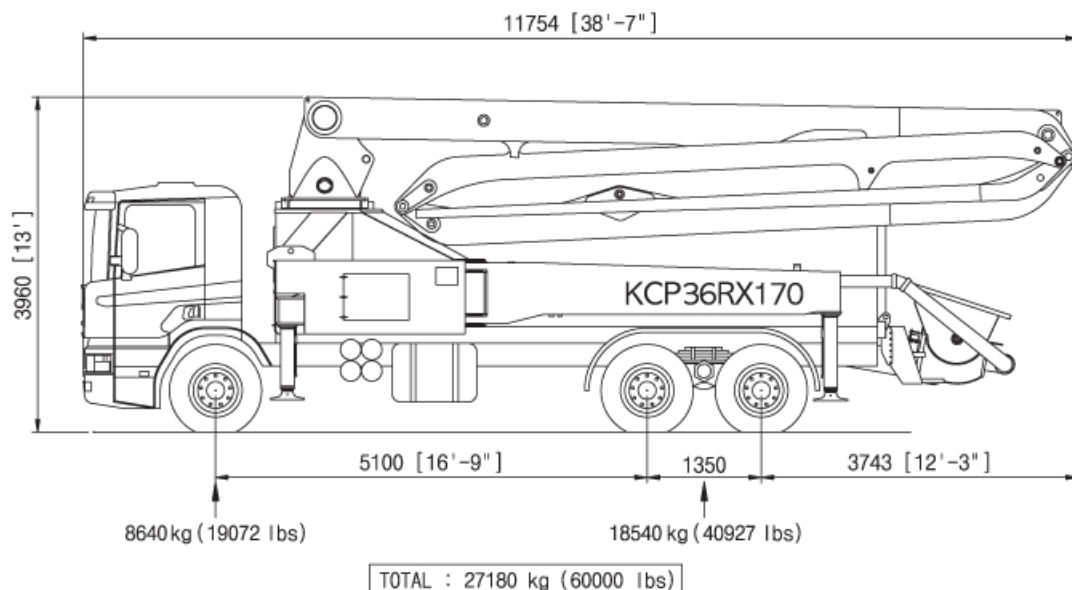


Our Pride...

KCP36RX170**■ Boom specifications**

Vertical reach	36 M	(118' 1")
Horizontal reach	32.2 M	(105' 8")
Reach from front of truck	29.8 M	(97' 8")
Unfolding height	9.1 M	(29' 10")
Section articulation	94 ° / 180 ° / 240 ° / 245 °	
Rotation	370 °	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	6.18 M	(20' 3")
Outrigger spread-rear	7.15 M	(23' 5")
Max.outrigger weight	20,500 kg	(45250 lbs)


■ Pump specifications

Maximum output	170 m ³ /h	(222 yd ³ /h)
Concrete cylinder	Ø230×2100mm	(9"×83")
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m ³	(21 ft ³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT	
	(Rexroth A11VQ260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

*Photos and drawings are for illustrative purpose only.

*Dimension will vary with different truck makers, models and specifications.

*Right to make technical amendments reserved.

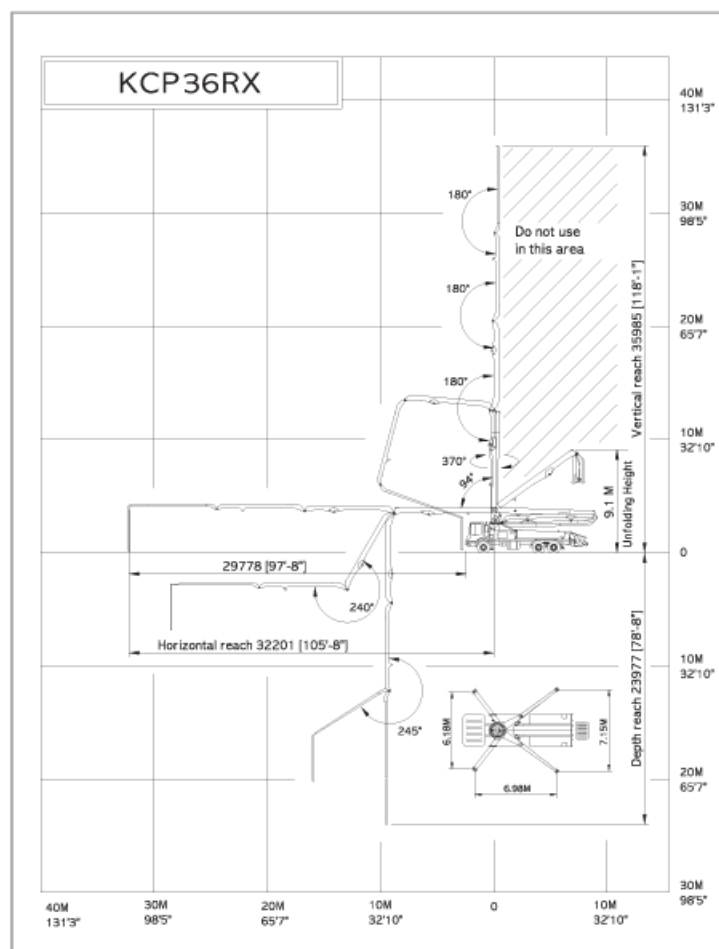■ Working diagram

*Maximum theoretical values listed.