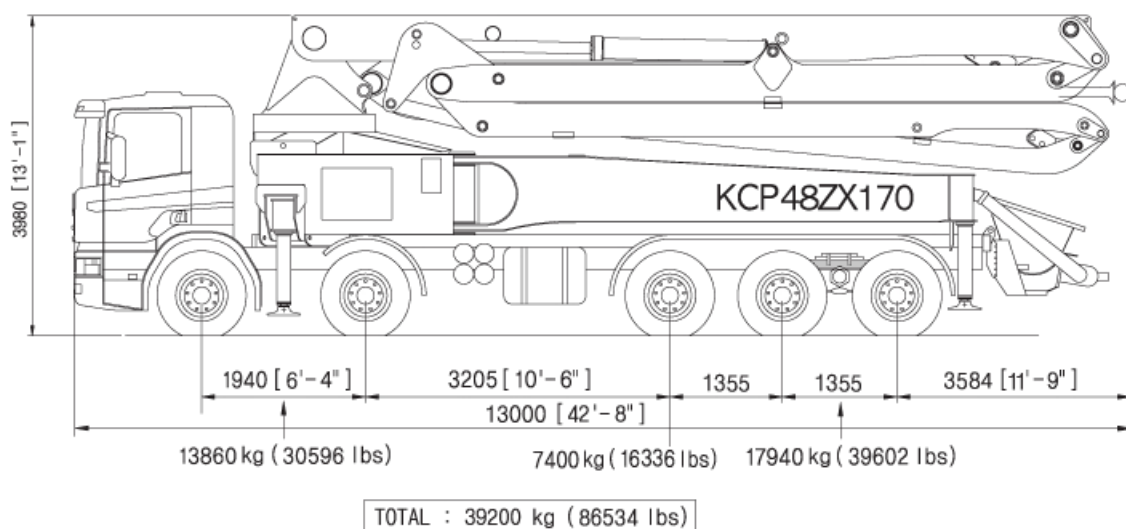


Our Pride...


**KCP48ZX170****■ Boom specifications**

|                           |                                 |             |
|---------------------------|---------------------------------|-------------|
| Vertical reach            | 47,1 M                          | (154' 6")   |
| Horizontal reach          | 43,3 M                          | (142')      |
| Reach from front of truck | 40,2 M                          | (132')      |
| Unfolding height          | 10,6 M                          | (34' 8")    |
| Section articulation      | 92° / 180° / 225° / 180° / 210° |             |
| Rotation                  | 370°                            |             |
| Delivery line             | 125 mm                          | (5")        |
| Proportional boom         | Yes                             |             |
| End hose length           | 4 M                             | (13')       |
| Outrigger spread-front    | 8,87 M                          | (29' 1")    |
| Outrigger spread-rear     | 10,1 M                          | (33')       |
| Max.outrigger weight      | 33,500 kg                       | (73950 lbs) |

\*Photos and drawings are for illustrative purpose only.

\*Dimension will vary with different truck makers, models and specifications.

\*Right to make technical amendments reserved.

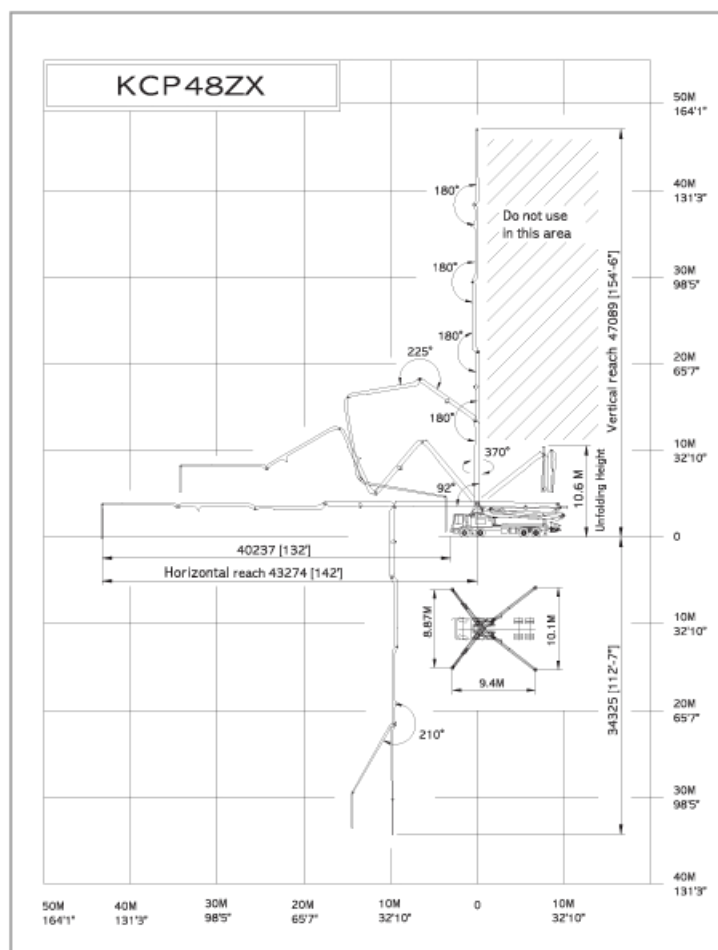**■ Working diagram****■ Pump specifications**

|                        |                                         |             |
|------------------------|-----------------------------------------|-------------|
| Maximum output         | 170 m³/h                                | (222 yd³/h) |
| Concrete cylinder      | Ø230×2100mm                             | (9"×83")    |
| Stroke per minute      | 32                                      |             |
| Concrete pressure(rod) | 72 bar                                  | (1044 psi)  |
| Hopper capacity        | 0,6 m³                                  | (21 ft³)    |
| S-tube                 | Ø200×Ø180                               | (8"×7")     |
| Hydraulic pump         | Kawasaki K3V140DT<br>(Rexroth A11VQ260) |             |
| Cycling system         | Hydraulic with manual overrides         |             |
| Max. aggregate size    | 60 mm                                   | (2 1/2")    |

\* Maximum theoretical values listed.

**■ 48ZX200 – Optional**

|                        |                                          |             |
|------------------------|------------------------------------------|-------------|
| Maximum output         | 200 m³/h                                 | (261 yd³/h) |
| Concrete cylinder      | Ø280×2100mm                              | (11"×83")   |
| Stroke per minute      | 25,6                                     |             |
| Concrete pressure(rod) | 87,5 bar                                 | (1270 psi)  |
| S-tube                 | Ø220×Ø180                                | (9"×7")     |
| Hydraulic pump         | Kawasaki K3V180DT<br>(Rexroth A20VLO190) |             |