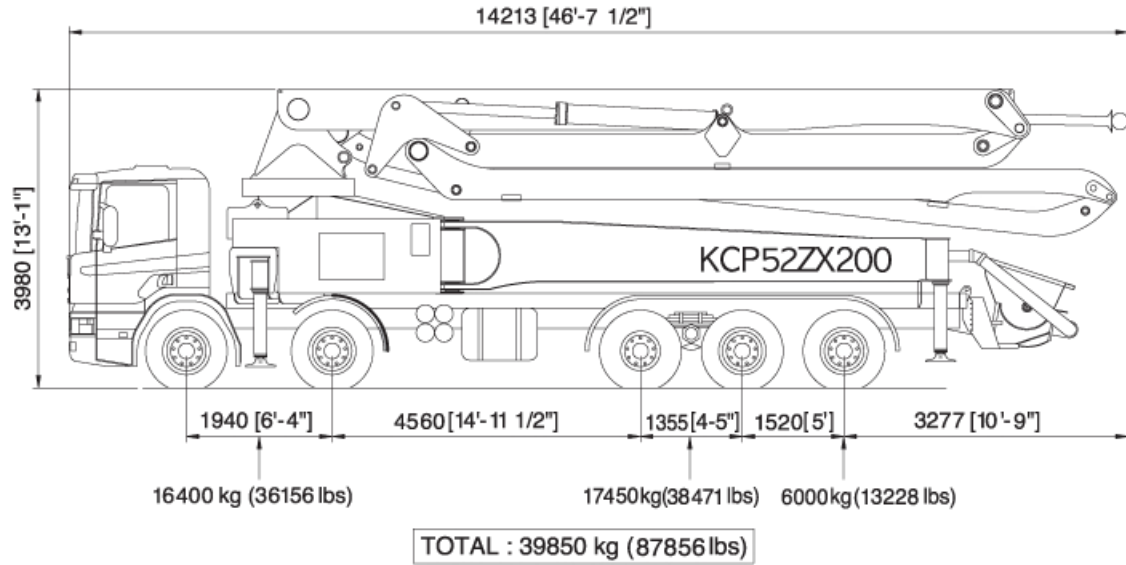


Our Pride...

KCP52ZX200**■ Boom specifications**

Vertical reach	51.3 M	(168' 5")
Horizontal reach	47.5 M	(155' 11")
Reach from front of truck	44.5 M	(145' 11")
Unfolding height	11.3 M	(36' 11")
Section articulation	92° / 180° / 225° / 180° / 210°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	9.1 M	(29' 10")
Outrigger spread-rear	10.6 M	(34' 10")
Max.outrigger weight	33,500 kg	(73950 lbs)

■ Pump specifications

Maximum output	200 m³/h	(261 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	25,6	
Concrete pressure(rod)	87,5 bar	(1270 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Rexroth A20VLO190 (Kawasaki K3V180DT)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

* Maximum theoretical values listed.

■ 52ZX225 – Optional

Maximum output	225 m³/h	(300 yd³/h)
Stroke per minute	29	
Hydraulic pump	Rexroth A20VLO190	

* Photos and drawings are for illustrative purpose only.

* Dimension will vary with different truck makers, models and specifications.

* Right to make technical amendments reserved.

■ Working diagram