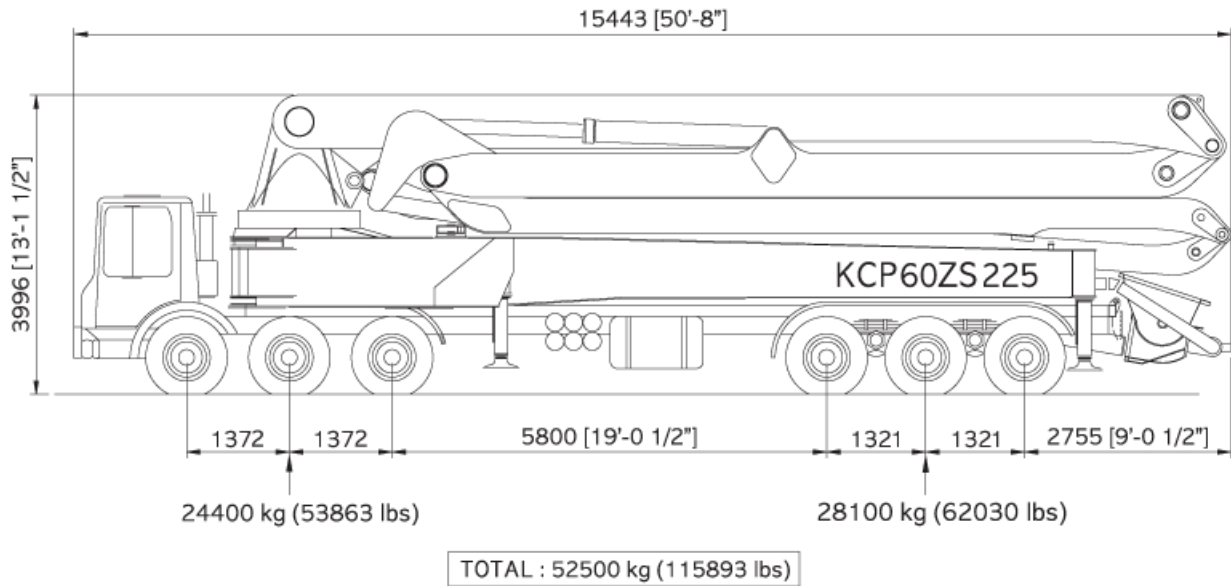


Our Pride...

KCP60ZS225

* Photos and drawings are for illustrative purpose only.

* Dimension will vary with different truck makers, models and specifications.

* Right to make technical amendments reserved.

■ Boom specifications

Vertical reach	59.5 M	(195' 4")
Horizontal reach	55.9 M	(183' 4")
Reach from front of truck	52.9 M	(173' 6")
Unfolding height	12.4 M	(40' 10")
Section articulation	92 ° / 180 ° / 215 ° / 180 ° / 210 °	
Rotation	370 °	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	11.8 M	(38' 9")
Outrigger spread-rear	16 M	(52' 8")
Max.outrigger weight	45,000 kg	(99340 lbs)

■ Pump specifications

Maximum output	225 m ³ /h	(300 yd ³ /h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	29	
Concrete pressure(rod)	87.5 bar	(1270 psi)
Hopper capacity	0.6 m ³	(21 ft ³)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Rexroth A20VLO190	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

* Maximum theoretical values listed.

■ Working diagram